

GPL 12400 12 40


GPL 12400 - (10-12 20° Eurobat) 10
260 - CSB,
100%



12 (6)			
40 A 20-	U	-1.75 /	25°
14.50			
400A (5)			
6.4			
		-15°	+50°
		-15°	+40°
		-15°	+40°
1186			
25°			
13.5 - 13.8		25°	
12 A ()			
			I _{max}
14.4 - 15.0		25°	
		25°	6- *
			5
ABS (- -)			



197±2.0	165±2.0	170.4±2.0	170.4±2.0
---------	---------	-----------	-----------

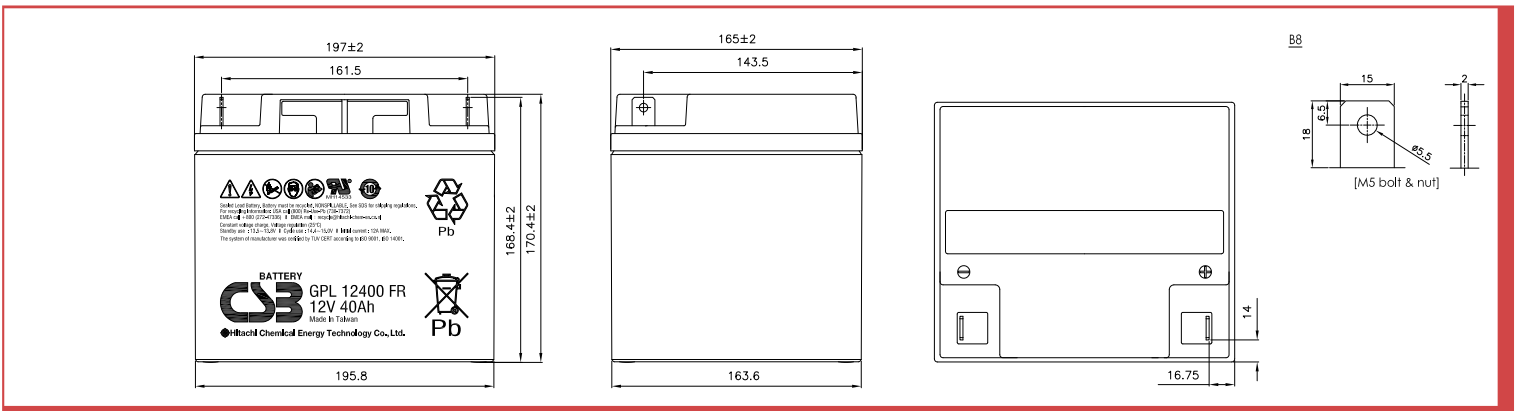

: A (25°)

U _K /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	162	104	78.2	47.7	28.1	20.4	16.3	11.6	7.36	4.83	3.93	2.03
1.67	145	96.5	74.5	46.7	27.9	20.3	16.2	11.5	7.34	4.77	3.85	1.94
1.70	137	92.8	72.4	46.1	27.8	20.2	16.1	11.4	7.32	4.75	3.82	1.91
1.75	124	87.4	69.5	45.0	27.6	20.1	16.0	11.3	7.29	4.69	3.81	1.84
1.80	111	81.3	65.9	43.8	27.4	19.9	15.9	11.2	7.25	4.62	3.80	1.77
1.85	98.1	75.1	62.4	42.5	27.0	19.8	15.8	11.1	7.22	4.56	3.64	1.70

: / (25°)

U _K /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	1941	1242	938	572	338	245	195	139	88.4	58.0	47.2	24.4
1.67	1735	1158	895	558	335	243	194	138	88.1	57.3	46.4	23.3
1.70	1647	1117	869	552	334	242	193	137	87.9	57.0	46.0	22.9
1.75	1490	1049	830	539	331	241	192	136	87.5	56.3	45.2	22.1
1.80	1334	975	791	525	328	239	191	135	87.2	55.6	44.4	21.3
1.85	1178	902	749	510	324	238	190	134	86.7	54.8	43.7	20.6