

# GPL 12880 12 94


GPL 12880 - (10-12 20° Eurobat) 10  
260 - CSB,  
100%



12 (6 )			
94 A 20-	U	-1.75 /	25°
29.70			
800A (5 )			
3.6			
		-15°	+50°
		-15°	+40°
		-15°	+40°
2098			
25°			
13.5 - 13.8		25°	
26.4 A ( )			
			I <sub>max</sub>
14.4 - 15.0		25°	
		25°	6- *
			6



308.7±2.5	169.0±2.0	210.6±2.5	213.6±2.5
-----------	-----------	-----------	-----------

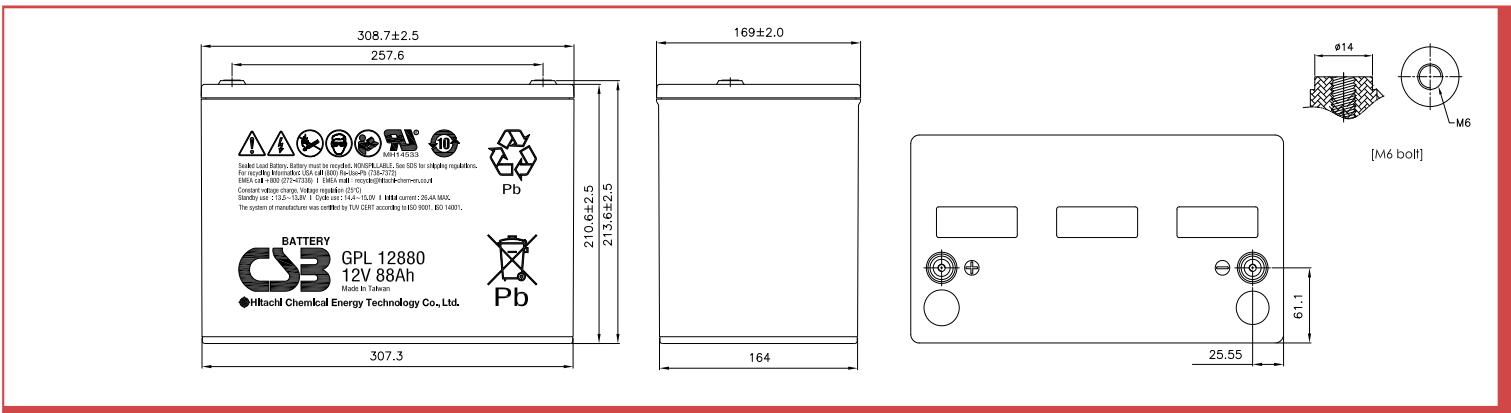

**: A (25° )**

U <sub>k</sub> /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	349	232	175	103	62.8	45.5	36.3	25.6	17.0	11.3	9.21	4.87
1.67	321	225	171	102	62.4	45.2	36.0	25.5	16.9	11.2	9.12	4.84
1.70	311	219	169	101	61.4	44.8	35.7	25.2	16.8	11.1	9.10	4.83
1.75	274	199	163	99	60.3	43.9	35.1	25.1	16.6	11.0	8.96	4.74
1.80	246	186	154	96.1	58.8	43.1	34.6	24.6	16.2	10.8	8.85	4.66
1.85	215	170	138	90.3	55.8	41	32.9	23.8	15.8	10.4	8.51	4.48

**: / (25° )**

U <sub>k</sub> /T	5	10	15	30	60	90	2	3	5	8	10	20
1.60	3535	2496	1941	1177	720	535	434	306	203	136	110	58.3
1.67	3307	2417	1919	1169	719	531	428	305	202	135	109	57.9
1.70	3202	2373	1888	1166	716	529	426	304	201	134	108	57.8
1.75	2995	2261	1828	1145	707	524	424	301	200	132	107	57.5
1.80	2782	2129	1734	1113	694	516	418	298	198	130	106	57.1
1.85	2434	1955	1581	1061	671	495	400	287	190	125	103	55.3