

HRL 12150W₁₂ 155 /

HRL12150W -


20%

: 10 Eurobat
100%



260	(10-12	20°		
12 (6)			
155 /	15-		U	-1.67 / 25°
11.75				
225A (5)			
7.3				
		-15°	+50°	
		-15°	+40°	
		-15°	+40°	
1116				
25°				
13.5 - 13.8	25°			
15.0 A (I _{max})
14.4 - 15.0	25°			
	25°	6-		*
6				
ABS (-	-)

195.6±2.0	130±1.5	172±2.0	172±2.0
-----------	---------	---------	---------

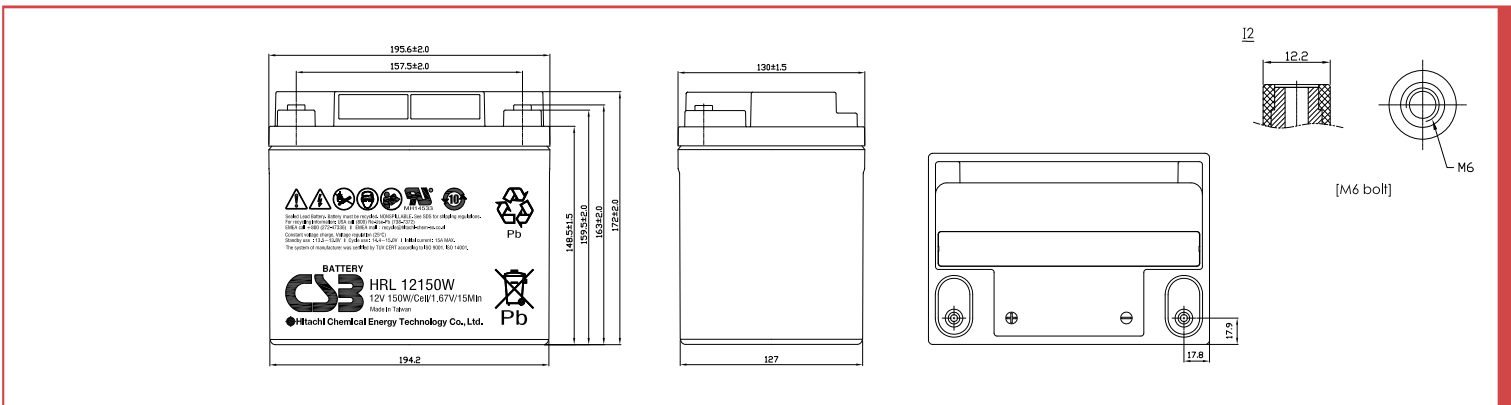

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	-	-	169	153	127	116	86.7	69.6	50.4	36.4	28.9	20.8
1.67	-	-	152	139	116	107	82.2	66.3	48.4	35.3	28.6	20.5
1.70	-	-	144	132	112	103	80.0	64.7	47.5	34.8	28.4	20.4
1.75	-	-	132	122	104	96.8	76.0	62.0	45.7	33.6	27.8	20.0
1.80	-	-	119	111	96.2	90.0	71.1	58.4	43.8	32.2	26.8	19.5
1.85	-	-	107	100	88.0	82.8	67.0	55.1	41.7	30.9	25.0	18.6

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	-	-	1794	1636	1373	1263	968	788	577	421	335	244
1.67	-	-	1624	1494	1275	1182	935	753	559	415	334	239
1.70	-	-	1549	1430	1228	1143	916	737	548	409	332	236
1.75	-	-	1422	1321	1149	1075	877	704	530	399	325	231
1.80	-	-	1302	1217	1069	1006	825	675	507	383	314	226
1.85	-	-	1188	1118	996	943	773	639	486	364	296	222