

# HRL 12200W<sub>12</sub> 215 /

HRL12200W -

20%


: 10 Eurobat  
100%



260	(10-12	20°		
12 (6	)			
215 /	15-	U	-1.67 /	25°
17.3				
400A (5	)			
5.5				
	: -15°	+50°		
	: -15°	+40°		
	: -15°	+40°		
1509				
25°				
13.5 - 13.8	25°			
20.0 A (				
				I <sub>max</sub>
14.4 - 15.0	25°			
	25°	6-		*
	6			



228±2.5	138.4±1.5	201.3±2.5	206.3±2.5
---------	-----------	-----------	-----------

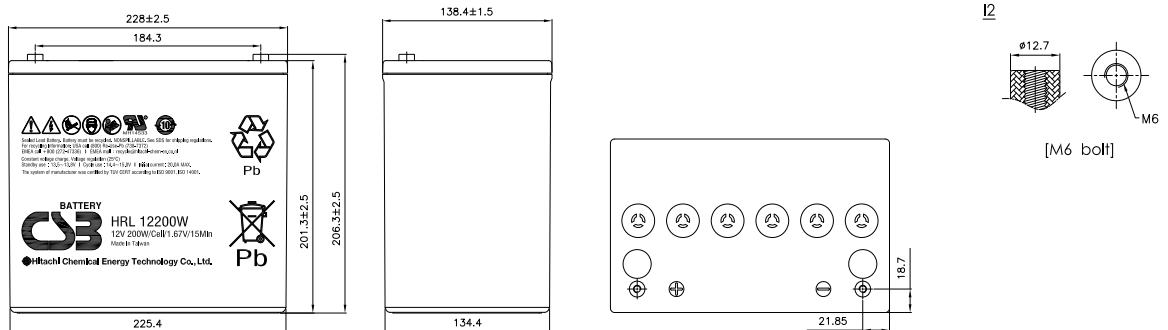

## : A (25° )

U <sub>K</sub> /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	304	256	243	221	190	164	123	98.9	71.9	52.6	41.8	29.9
1.67	279	232	218	205	177	157	118	97.0	71.2	52.0	41.2	29.5
1.70	260	218	209	196	170	151	116	95.7	70.3	51.8	41.1	29.4
1.75	233	197	192	176	156	141	111	92.0	68.2	50.7	40.3	29.1
1.80	198	172	165	156	140	126	102	85.2	64.6	48.7	38.9	28.2
1.85	162	146	145	136	120	110	91.3	76.1	59.0	45.3	36.2	26.6

## : / (25° )

U <sub>K</sub> /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	3094	2572	2448	2279	1962	1745	1333	1098	816	602	476	343
1.67	2861	2395	2306	2127	1874	1666	1308	1083	809	600	475	342
1.70	2732	2308	2207	2045	1815	1625	1282	1066	796	596	474	339
1.75	2458	2120	2022	1904	1717	1523	1232	1027	772	585	464	335
1.80	2231	1889	1840	1765	1562	1409	1158	959	738	564	452	326
1.85	1764	1691	1659	1544	1376	1255	1035	873	687	529	423	310