

HRL 12280W₁₂ 280 /

HRL12280W -


20%

: 10 Eurobat
100%



260	(10-12	20°		
12 (6)			
280 /	15-	U	- 1.67 /	25°
25.8				
800A (5)			
3.5				
	: -15°	+50°		
	: -15°	+40°		
	: -15°	+40°		
2576				
25°				
13.5 - 13.8	25°			
28.0 A ()			
			I _{max}	
14.4 - 15.0	25°			
	25°	6-	*	
6				

261±2.5	168.5±2.0	210.5±2.5	213.5±2.5
---------	-----------	-----------	-----------

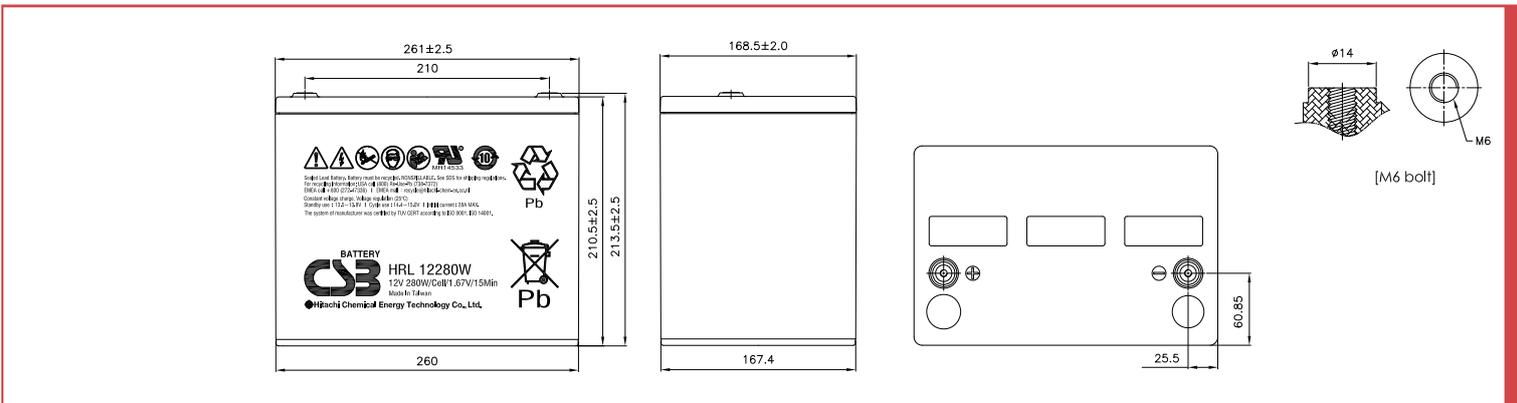

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	-	-	318	287	237	216	167	137	103	76.0	59.9	44.6
1.67	-	-	283	258	217	200	155	128	98.3	72.9	57.7	42.1
1.70	-	-	266	244	207	192	149	124	96.3	71.2	55.6	40.6
1.75	-	-	236	218	188	175	141	117	91.3	68.5	53.8	38.5
1.80	-	-	207	194	171	161	131	111	85.4	63.7	50.1	36.3
1.85	-	-	178	169	152	145	122	105	81.3	59.7	47.3	34.7

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	-	-	3354	3039	2519	2304	1788	1476	1110	822	648	485
1.67	-	-	3036	2778	2347	2166	1700	1417	1079	804	636	466
1.70	-	-	2880	2650	2263	2100	1643	1384	1060	792	618	454
1.75	-	-	2615	2422	2095	1955	1575	1326	1023	780	600	436
1.80	-	-	2329	2176	1913	1800	1493	1274	980	738	581	422
1.85	-	-	2016	1914	1735	1656	1408	1212	938	694	550	404