

XHRL 12620W 12 620 /

XHRL 12620W -


20%

260 (10-12 20° Eurobat) : 10
100%

12 (6)			
620 / 15-		U -1.67 /	25°
47.2			
800A (5)			
2.4			
	-15°	+50°	
	-15°	+40°	
	-15°	+40°	
3722			
25°			
13.5 - 13.8	25°		
62 A ()		I _{max}	
14.4 - 15.0	25°		
	25°	6-	*
6			
			UL 94-V0



343.0±2.5	170.0±2.0	273.2±2.5	275.7±2.5
-----------	-----------	-----------	-----------

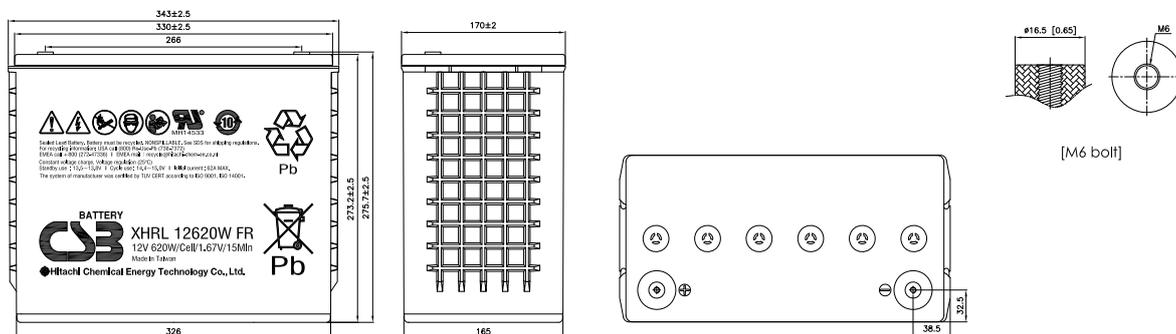

: A (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	766	641	601	571	504	458	349	283	206	147	116	81.7
1.67	660	585	543	511	466	420	326	273	200	144	114	79.8
1.70	622	545	512	486	448	398	315	267	196	142	113	78.3
1.75	553	485	465	449	398	356	293	252	188	138	110	78.2
1.80	494	443	409	383	344	315	270	229	175	131	106	75.6
1.85	437	360	339	322	298	280	239	201	158	120	97.9	71.1

: / (25°)

U _k /T	2	4	5	6	8	10	15	20	30	45	60	90
1.60	7070	6088	5774	5529	5280	4692	3770	3108	2304	1681	1344	966
1.67	6439	5680	5542	5432	4894	4387	3720	2983	2249	1654	1329	959
1.70	6090	5494	5406	5336	4692	4262	3540	2918	2222	1642	1325	957
1.75	5579	5208	4994	4825	4311	3969	3282	2742	2135	1592	1293	944
1.80	5235	4660	4427	4246	3894	3639	2956	2515	2017	1522	1247	916
1.85	4134	3765	3715	3674	3470	3120	2576	2257	1864	1414	1163	867